

# CERTIFICATE

of Conformity of the Factory Production Control

**1922 - CPR - 0557**

In compliance with Regulation (EU) No 305/2011 of the European Parliament and of the council of 9 March 2011 (the Construction Products Regulation or CPR), this certificate applies to the construction product

**Flexible sheets for waterproofing - Plastic and rubber damp proof sheets including plastic and rubber basement tanking sheet. Thickness: 2mm**

(For list of the controlled characteristics of the product, see Annexes I, an inseparable part of this certificate.)

placed on the market under the name or trade mark of

**ANKAY SU YALITIM PLASTİK SAN. ve. TİC. LTD. ŞTİ**

**O.S.B. 22. CAD. NO:54 MELİKGAZI / KAYSERİ**

and produced in the manufacturing plant

**ANKAY SU YALITIM PLASTİK SAN. ve. TİC. LTD. ŞTİ**


**O.S.B. 22. CAD. NO:54 MELİKGAZI / KAYSERİ**

This certificate attests that all provisions concerning the assessment and verification of constancy of performance described in Annex ZA of the standards

**EN 13967:2012**

under system 2+ were applied and the factory production control fulfils all the prescribed requirements set out above.

This certificate was first issued on 19.02.2016 and will remain valid until 19.02.2018 as long as neither the harmonised standard, the construction product, the AVCP methods nor the manufacturing conditions in the plant are modified significantly, unless suspended or withdrawn by the notified factory production control certification body. The certificate is supported through annual surveillance audit and is reissued after each surveillance audit. The validity of the certificate may be confirmed in the CE register at the web address [www.dedal-bg.net](http://www.dedal-bg.net).

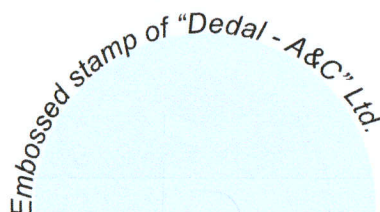

**Manager:**

Issued:  
Burgas, 17 February 2017

arch. Galina Vasileva



**ANNEX I TO CERTIFICATE OF CONFORMITY OF THE FACTORY PRODUCTION CONTROL 1922-CPR-0557/ 17.02.2017**

List of controlled characteristics, acc. to EN 13967:2012

PVC Flexible sheets for waterproofing - 2mm

Essential characteristics	Method	Unit	Results
Reaction to fire	EN ISO 11925-2	-	Class E
Watertightness	EN 1928	-	Pass at 60 kPa
Tear resistance - Transverse - Longitudinal	EN 12310-1	N	≥ 270
Tensile strength - Transverse - Longitudinal Elongation at break - Transverse - Longitudinal	EN 12311-2	N/mm <sup>2</sup>	≥ 15 ≥ 15 ≥ 250 % ≥ 250 %
Resistance to static loading	EN 12730	kg	≥ 20
Joint strength	EN 12317-2	N	≥ 640
Impact resistance	EN 12691	mm	≥ 460
Durability of watertightness against chemicals	EN 1874 EN 1928	-	Pass

This certificate was first issued on 19.02.2016 and will remain valid until 19.02.2018 as long as neither the harmonised standard, the construction product, the AVCP methods nor the manufacturing conditions in the plant are modified significantly, unless suspended or withdrawn by the notified factory production control certification body. The certificate is supported through annual surveillance audit and is reissued after each surveillance audit. The validity of the certificate may be confirmed in the CE register at the web address [www.dedal-bg.net](http://www.dedal-bg.net).

Issued:  
Burgas, 17 February 2017

Embossed stamp of "Dedal - A&amp;C" Ltd.

**Manager:**

arch. Galina Vasileva